

# ACW SERIES


- ▶ Direct drive brushless motor
- ▶ Fully integrated with encoder and bearing
- ▶ No cogging torque
- ▶ Precise homing through index pulse
- ▶ Large centre hole
- ▶ Low profile

## ACW120

ACW120			
Performance Parameters	Symbol	Unit	Parallel
Continuous Torque @100°C	T <sub>cn</sub>	Nm	0.6
Peak Torque	T <sub>pk</sub>	Nm	2.1
Torque Constant ±10%	K <sub>t</sub>	Nm/Arms	0.14
Back EMF Constant ±10%	K <sub>e</sub>	Vpeak/rpm	0.012
Motor Constant @25°C	K <sub>m</sub>	Nm/Sqrt(W)	0.10
Resistance (L-L) @25°C ±10%	R <sub>25</sub>	Ω	1.43
Inductance (L-L) ±20%	L	mH	0.47
Electrical Time Constant	τ <sub>e</sub>	ms	0.33
Continuous Current @100°C	I <sub>cn</sub>	Arms	4.6
Peak Current	I <sub>pk</sub>	Arms	16.1
Continuous Power Dissipation @100°C	P <sub>cn</sub>	W	58.5
Max. Coil Temperature	t <sub>max</sub>	°C	100
Thermal Dissipation Constant	K <sub>thn</sub>	W/°C	0.78
Max. Bus Voltage	U <sub>bus</sub>	Vdc	330.0
Pole Number	2P	-	16
Max. Speed For Standard Axial/Radial Runout @230V AC	Ω <sub>max</sub>	rpm	400
Max. Speed For Optional Axial/Radial Runout (P10, P5) @230V AC	Ω <sub>max</sub>	rpm	120
Mechanical Parameters			
Overall Mass	m <sub>n</sub>	kg	2.0
Rotor Inertia	J <sub>r</sub>	kg.m <sup>2</sup>	6.584E-04
Axial Runout	-	μm	15 (10,5)
Radial Runout	-	μm	15 (10,5)
Max. Axial Load (Upright Mounting)	-	N	150.0
Max. Axial Load (Inverted / Wall Mounting)	-	N	15.0
Max. Moment Load (Upright Mounting)	-	Nm	14.7
Max. Moment Load (Inverted / Wall Mounting)	-	Nm	1.47
Encoder Parameters			
ABI Optical Incremental Encoder (SIN/COS)	-	lines / rev	3934
ABI Optical Incremental Encoder (80x)	-	counts / rev	314720
ABI Optical Incremental Encoder (160x)	-	counts / rev	629,440
ABI Optical Incremental Encoder (400x)	-	counts / rev	1,573,600
Accuracy after Error Mapping	-	arc sec	+/-8
Repeatability	-	arc sec	+/-4
Other Information			
Insulation Class	Class B (130°C)		
Protection Grade	IP40		
Compliance with Global Standards	RoHS, CE		
Ambient Temperature	Operation	0°C to 40°C (non-freezing)	
	Storage	-15°C to 70°C (non-freezing)	
Ambient Humidity	Operation	10%RH to 80%RH (non-condensing)	
	Storage	10%RH to 90%RH (non-condensing)	
Recommended Ambience	Indoor (no direct sunlight); No corrosive gas, inflammable gas, oil mist or dust.		




- ① Measurement is taken at ambient temperature 25°C. Value depends on the thermal environment.
  - ② Resistance is measured by DC current with standard 3 m cable.
  - ③ Inductance is measured by current frequency of 1 kHz.
  - ④ The value is based on ABI optical SIN/COS encoder (4096x interpolation) under max. bus voltage.
  - ⑤ The runout value in parenthesis is optional.
  - ⑥ Please refer to the illustration for different mountings.
  - ⑦ Based on ABI optical SIN/COS encoder (4096x interpolation) with P5 runout.
- The contents of datasheet are subjected to change without prior notice.

### Dimension

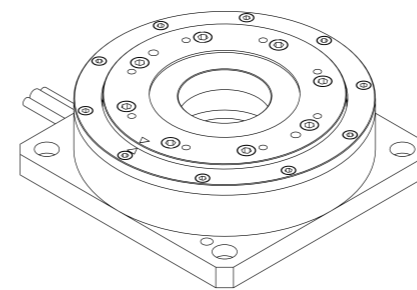

- Note:
- ① 37mm diameter through hole
  - ② Shaded area, mounting surface

### Torque-Speed Curve

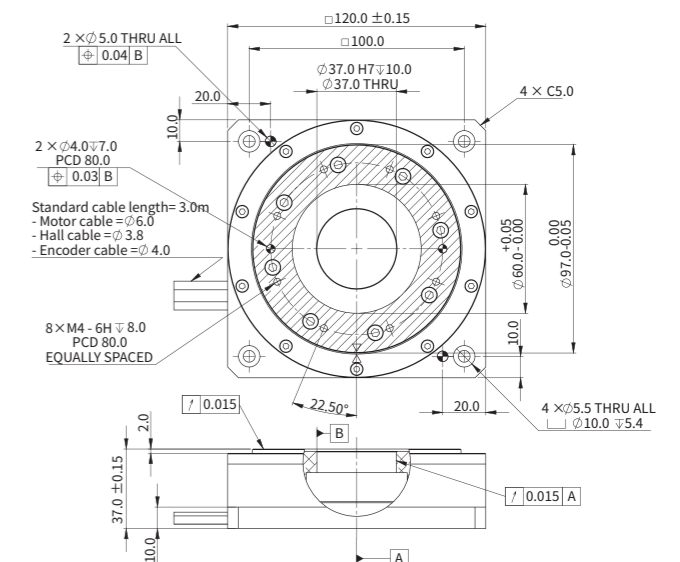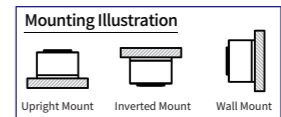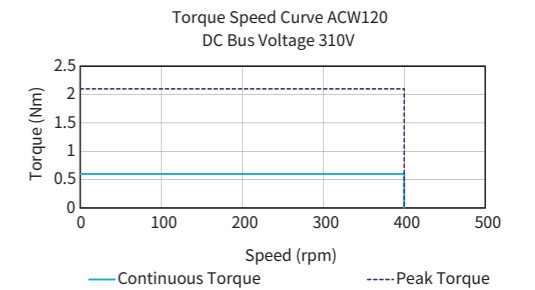

UK & Ireland Official Distributor



11-15 Francis Avenue, Bournemouth,  
Dorset UK BH11 8NX  
Tel.: (+44) 01202 599922  
enquiries@motioncontrolproducts.com  
www.motioncontrolproducts.com

enquiries@motioncontrolproducts.com

www.motioncontrolproducts.com

ACW170

ACW170			
Performance Parameters	Symbol	Unit	Parallel
Continuous Torque @100°C	T <sub>cn</sub>	Nm	2.8
Peak Torque	T <sub>pk</sub>	Nm	11.9
Torque Constant ±10%	K <sub>t</sub>	Nm/Arms	0.66
Back EMF Constant ±10%	K <sub>e</sub>	Vpeak/rpm	0.056
Motor Constant @25°C	K <sub>m</sub>	Nm/Sqrt(W)	0.32
Resistance (L-L) @25°C ±10%	R <sub>25</sub>	Ω	2.76
Inductance (L-L) ±20%	L	mH	1.65
Electrical Time Constant	τ <sub>e</sub>	ms	0.60
Continuous Current @100°C	I <sub>cn</sub>	Arms	4.2
Peak Current	I <sub>pk</sub>	Arms	14.7
Continuous Power Dissipation @100°C	P <sub>cn</sub>	W	94.1
Max. Coil Temperature	t <sub>max</sub>	°C	100
Thermal Dissipation Constant	K <sub>thn</sub>	W/°C	1.26
Max. Bus Voltage	U <sub>bus</sub>	Vdc	330.0
Pole Number	2P	-	16
Max. Speed For Standard Axial/Radial Runout @230V AC	Ω <sub>max</sub>	rpm	250
Max. Speed For Optional Axial/Radial Runout (P10, P5) @230V AC	Ω <sub>max</sub>	rpm	120



Mechanical Parameters			
Overall Mass	m <sub>n</sub>	kg	3.7
Rotor Inertia	J <sub>r</sub>	kg.m <sup>2</sup>	2.020E-03
Axial Runout	-	μm	18 (10,5)
Radial Runout	-	μm	18 (10,5)
Max. Axial Load (Upright Mounting)	-	N	230.0
Max. Axial Load (Inverted / Wall Mounting)	-	N	23.0
Max. Moment Load (Upright Mounting)	-	Nm	31.7
Max. Moment Load (Inverted / Wall Mounting)	-	Nm	3.17

Encoder Parameters			
ABI Optical Incremental Encoder (SIN/COS)	-	lines / rev	5560
ABI Optical Incremental Encoder (80x)	-	counts / rev	444800
ABI Optical Incremental Encoder (160x)	-	counts / rev	889,600
ABI Optical Incremental Encoder (400x)	-	counts / rev	2,224,000
Accuracy after Error Mapping	-	arc sec	+/-6
Repeatability	-	arc sec	+/-3

Other Information			
Insulation Class	Class B (130°C)		
Protection Grade	IP40		
Compliance with Global Standards	RoHS, CE		
Ambient Temperature	Operation	0°C to 40°C (non-freezing)	
	Storage	-15°C to 70°C (non-freezing)	
Ambient Humidity	Operation	10%RH to 80%RH (non-condensing)	
	Storage	10%RH to 90%RH (non-condensing)	
Recommended Ambience	Indoor (no direct sunlight); No corrosive gas, inflammable gas, oil mist or dust.		



- 1 Measurement is taken at ambient temperature 25°C. Value depends on the thermal environment.
  - 2 Resistance is measured by DC current with standard 3 m cable.
  - 3 Inductance is measured by current frequency of 1 kHz.
  - 4 The value is based on ABI optical SIN/COS encoder (4096x interpolation) under max. bus voltage.
  - 5 The runout value in parenthesis is optional.
  - 6 Please refer to the illustration for different mountings.
  - 7 Based on ABI optical SIN/COS encoder (4096x interpolation) with P5 runout.
- The contents of datasheet are subjected to change without prior notice.

Dimension

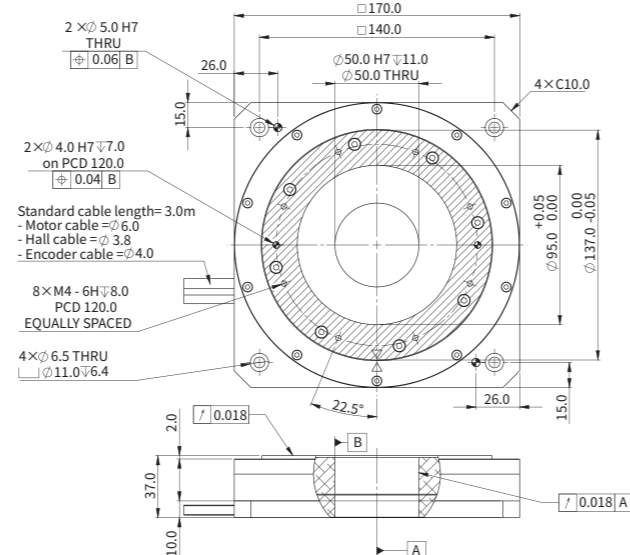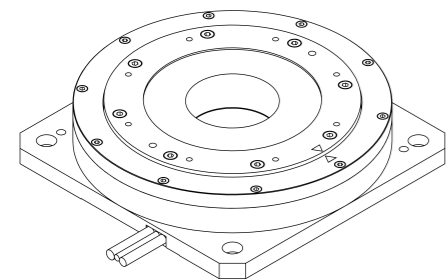

- 1 50mm diameter through hole
- 2 Shaded area, mounting surface

Torque-Speed Curve

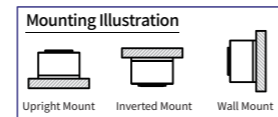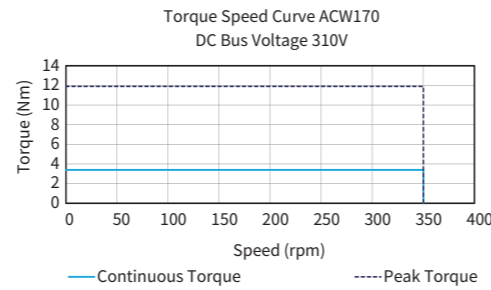

ACW220

ACW220			
Performance Parameters	Symbol	Unit	Parallel
Continuous Torque @100°C	T <sub>cn</sub>	Nm	7.4
Peak Torque	T <sub>pk</sub>	Nm	35.9
Torque Constant ±10%	K <sub>t</sub>	Nm/Arms	1.95
Back EMF Constant ±10%	K <sub>e</sub>	Vpeak/rpm	0.167
Motor Constant @25°C	K <sub>m</sub>	Nm/Sqrt(W)	0.71
Resistance (L-L) @25°C ±10%	R <sub>25</sub>	Ω	5.06
Inductance (L-L) ±20%	L	mH	4.72
Electrical Time Constant	τ <sub>e</sub>	ms	0.93
Continuous Current @100°C	I <sub>cn</sub>	Arms	3.8
Peak Current	I <sub>pk</sub>	Arms	13.3
Continuous Power Dissipation @100°C	P <sub>cn</sub>	W	141.3
Max. Coil Temperature	t <sub>max</sub>	°C	100
Thermal Dissipation Constant	K <sub>thn</sub>	W/°C	1.88
Max. Bus Voltage	U <sub>bus</sub>	Vdc	330.0
Pole Number	2P	-	16
Max. Speed For Standard Axial/Radial Runout @230V AC	Ω <sub>max</sub>	rpm	190
Max. Speed For Optional Axial/Radial Runout (P10, P5) @230V AC	Ω <sub>max</sub>	rpm	120



Mechanical Parameters			
Overall Mass	m <sub>n</sub>	kg	7.0
Rotor Inertia	J <sub>r</sub>	kg.m <sup>2</sup>	8.354E-03
Axial Runout	-	μm	18 (10,5)
Radial Runout	-	μm	18 (10,5)
Max. Axial Load (Upright Mounting)	-	N	300.0
Max. Axial Load (Inverted / Wall Mounting)	-	N	30.0
Max. Moment Load (Upright Mounting)	-	Nm	55.2
Max. Moment Load (Inverted / Wall Mounting)	-	Nm	5.52

Encoder Parameters			
ABI Optical Incremental Encoder (SIN/COS)	-	lines / rev	7500
ABI Optical Incremental Encoder (80x)	-	counts / rev	600000
ABI Optical Incremental Encoder (160x)	-	counts / rev	1,200,000
ABI Optical Incremental Encoder (400x)	-	counts / rev	3,000,000
Accuracy after Error Mapping	-	arc sec	+/-6
Repeatability	-	arc sec	+/-3

Other Information			
Insulation Class	Class B (130°C)		
Protection Grade	IP40		
Compliance with Global Standards	RoHS, CE		
Ambient Temperature	Operation	0°C to 40°C (non-freezing)	
	Storage	-15°C to 70°C (non-freezing)	
Ambient Humidity	Operation	10%RH to 80%RH (non-condensing)	
	Storage	10%RH to 90%RH (non-condensing)	
Recommended Ambience	Indoor (no direct sunlight); No corrosive gas, inflammable gas, oil mist or dust.		

- 1 Measurement is taken at ambient temperature 25°C. Value depends on the thermal environment.
  - 2 Resistance is measured by DC current with standard 3 m cable.
  - 3 Inductance is measured by current frequency of 1 kHz.
  - 4 The value is based on ABI optical SIN/COS encoder (4096x interpolation) under max. bus voltage.
  - 5 The runout value in parenthesis is optional.
  - 6 Please refer to the illustration for different mountings.
  - 7 Based on ABI optical SIN/COS encoder (4096x interpolation) with P5 runout.
- The contents of datasheet are subjected to change without prior notice.

Dimension

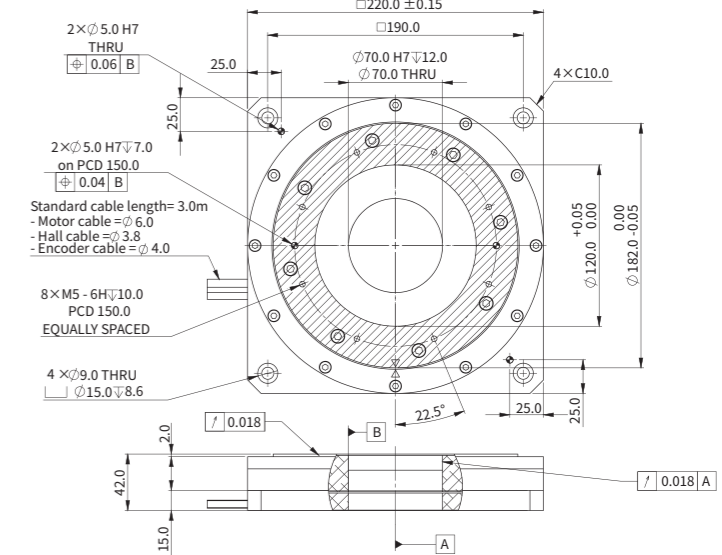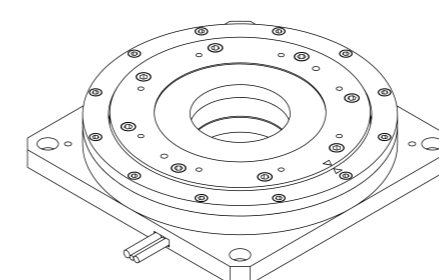

- 1 70mm diameter through hole
- 2 Shaded area, mounting surface


Introduction Sizing Guide Frequently Asked Questions Linear Motors Voice Coil Motors Direct Drive Rotary Motors Motion Control of Gantry Stages

Introduction Sizing Guide Frequently Asked Questions Linear Motors Voice Coil Motors Direct Drive Rotary Motors Motion Control of Gantry Stages

Akrbis systems

Akrbis systems

# Motor Cable Connection Diagram

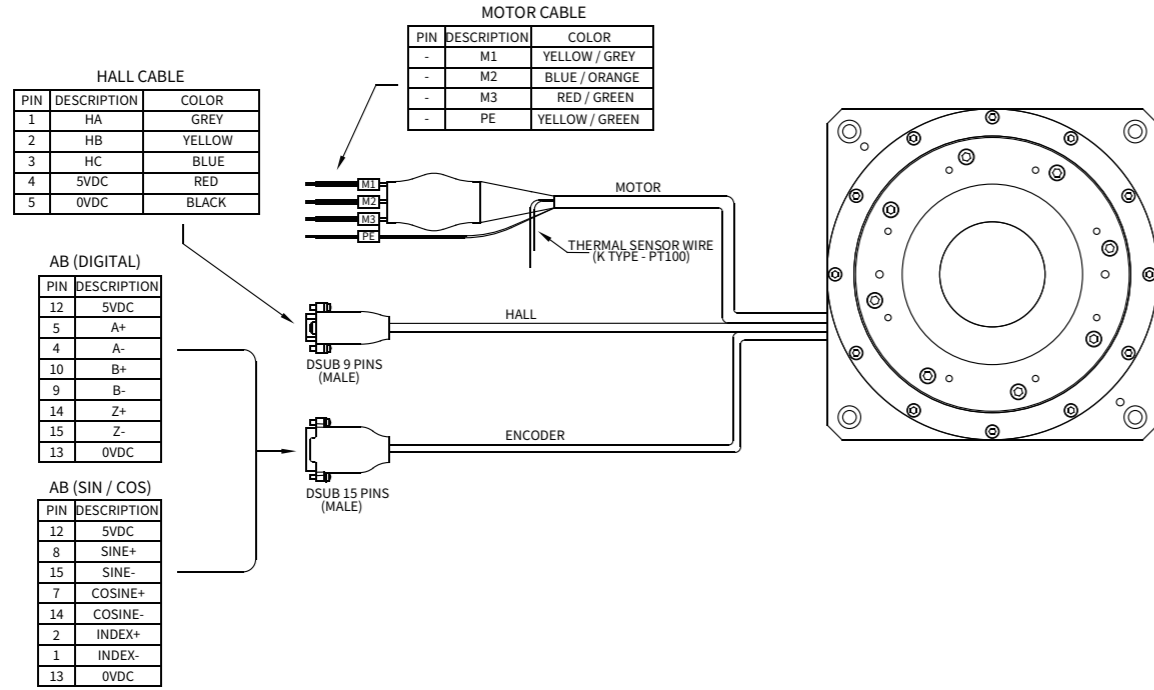

# Part Numbering

**ACW170-37-P-K-H9D-3.0-FB-AB-5560-SINCOS-P18**

Motor Model:  
[ACW120-37](#)  
[ACW170-37](#)  
[ACW220-42](#)

Winding:  
[P=Parallel](#)

Thermal Sensor Options:  
[K=PT100 \(RTD\)](#)

Hall Cable Options:  
[H9D](#) / [NH](#)

Cable Length (m):  
[3.0](#)

Runout:  
[P5](#)  
[P10](#)  
[P15](#)  
[P18](#)

Interpolation Options:  
[SINCOS](#) / [80X](#) / [160X](#) / [400X](#)

Encoder:  
[ACW120:AB-3934](#)  
[ACW170:AB-5560](#)  
[ACW220:AB-7500](#)

Motor Cable Options:  
[FB](#)

- H9D=With Built-in hall sensor, comes with 9-Pins D-Sub Connector
- NH=Without Built-in Hall Sensor but with Thermal Sensor
- FB=With ferrite bead
- ACW120 / ACW170 / AXW220:P5= Axial Runout 5um, Radial Runout is 5um  
 ACW120 / ACW170 / AXW220:P10= Axial Runout 10um, Radial Runout is 10um  
 ACW120:P15= Axial Runout 15um, Radial Runout is 15um  
 ACW170 / AXW220:P18= Axial Runout 18um, Radial Runout is 18um

