


LMD STEPPER MOTOR

LMD•A57 CANopen



Specifications

Communication	Protocol type		CANopen CiA 301, CiA 402, CAN bus 2.0B active
	Baud rate		10 ... 1000 kbps
	ID		11 and/or 29 bit
	Isolation		Galvanic
	Features		Node guarding, heartbeat, SDOs, PDOs (variable mapping)
Input power	Voltage	VDC	+12 ... +60
	Current maximum ⁽¹⁾	Amp	3.5
Motor	Frame size	NEMA	23
		inches	2.3
		mm	57
	Performance level		Standard torque or premium high torque
	Holding torque	oz-in	103...416
		N-cm	73 ... 294
Length	stack sizes		1, 2 & 3
	Temperature Maximums	Power stage maximum	85°C (185°F)
		Motor maximum	100°C (212°F)
Ambient Operating Conditions	Operating Temperature		-20° to 50°C (-4° to 122°F)
	Temperature Variation		0.5°C/min (0.9°F/min)
	Humidity		5% to 95% (non-condensing)
Storage & Transport	Temperature		-25° to 70°C (-13° to 158°F)
	Temperature Variation		-25° to 30°C (-13° to 86°F)
	Humidity		5% to 95% (non-condensing)
Altitude	Installation Altitude		Up to 3280 ft (1000 m) above sea level ⁽⁶⁾
Protection	Type	Temperature warning	0...84°C, user selectable
		IP rating	IP20, IP65
		Earth grounding	Via product chassis ground lug
Hardware I/O, sourcing or sinking	One analog input ⁽²⁾	Resolution	12 bit
		Voltage range	0 ... +5 VDC, 0 ... +10 VDC, 0 ... 20 mA, 4 ... 20 mA
	Four signal inputs	Voltage range	+5 ... +24 VDC, TTL level compatible
		Protection	Over temp, short circuit, transient, over voltage, inductive clamp
	Two power outputs ⁽³⁾	Current rating	-100 ... +100 mA
		Voltage range	-24 ... +24 VDC
	One high-speed signal output	Current open collector/emitter	5.5 mA
		Voltage open collector	+60 VDC
Voltage open emitter		+7 VDC	
Aux. logic input	Voltage range ⁽⁴⁾		+12 ... +24 VDC
Encoder options	Multi-turn absolute	Position update/retention	Up to 30 days on internal power; 5 years with optional battery pack
		Incremental magnetic	Line count
Motion	Microstep resolution	Number of settings	20
		Steps per revolution	200, 400, 800, 1000, 1600, 2000, 3200, 5000, 6400, 10000, 12800, 20000, 25000, 25600, 40000, 50000, 51200, 36000 (0.01 deg/μstep), 21600 (1 arc minute/μstep), 25400 (0.001mm/μstep)
	Counters	Type	Position, encoder / 32 bit
		Edge rate maximum	5 MHz
	Velocity	Range	+/- 2,560,000
		Resolution	0.5961 steps per second
Accel/Decel	Range	1.1 x 10 ⁹ steps per second ²	
	Resolution	90.9 steps per second ²	
Software	Setup parameters		Storable to nonvolatile memory
	Transmit PDOs		Four (4) dynamically mappable
	Receive PDOs		Four (4) dynamically mappable
	Manufacturer specific objects		I/O configuration, run/hold current
	Modes of operation ⁽⁵⁾		Profile position, homing mode, profile velocity, profile torque, cyclic synch position
	Input functions		General purpose, homing mode profiles
	Output functions		General purpose

¹ Actual power supply current will depend on voltage and load.

² Not available on products with multi-turn absolute encoder.

³ Products with multi-turn absolute encoder have one power output.

⁴ When input voltage is removed, maintains power only to control and feedback circuits.

⁵ Profile torque is only available on products with an encoder.


⁶ Installation above 3280 ft (1000 m) may require derating output current and maximum ambient temperature.

LMD•A57 CANopen

Dimensions

LM•57 NEMA23 Motor, IP20-rated


inches (mm)

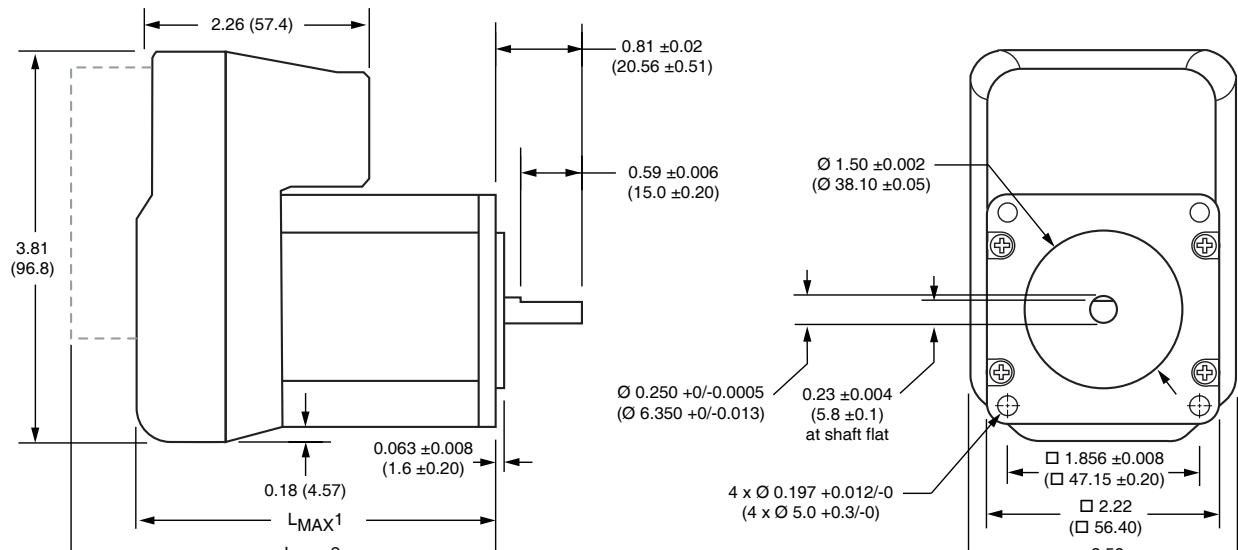

Motor Stack Length	Lmax1		Lmax2	
	Standard - LMD	High torque - LMH	Standard - LMD	High torque - LMH
Single	3.17 (80.5)	3.32 (84.3)	3.91 (99.3)	4.01 (101.8)
Double	3.52 (89.4)	3.73 (94.8)	4.26 (108.2)	4.36 (110.7)
Triple	4.38 (111.3)	4.60 (116.8)	5.13 (130.3)	5.23 (133.0)

LM•57•C NEMA23 Motor, IP65-rated⁽¹⁾

inches (mm)

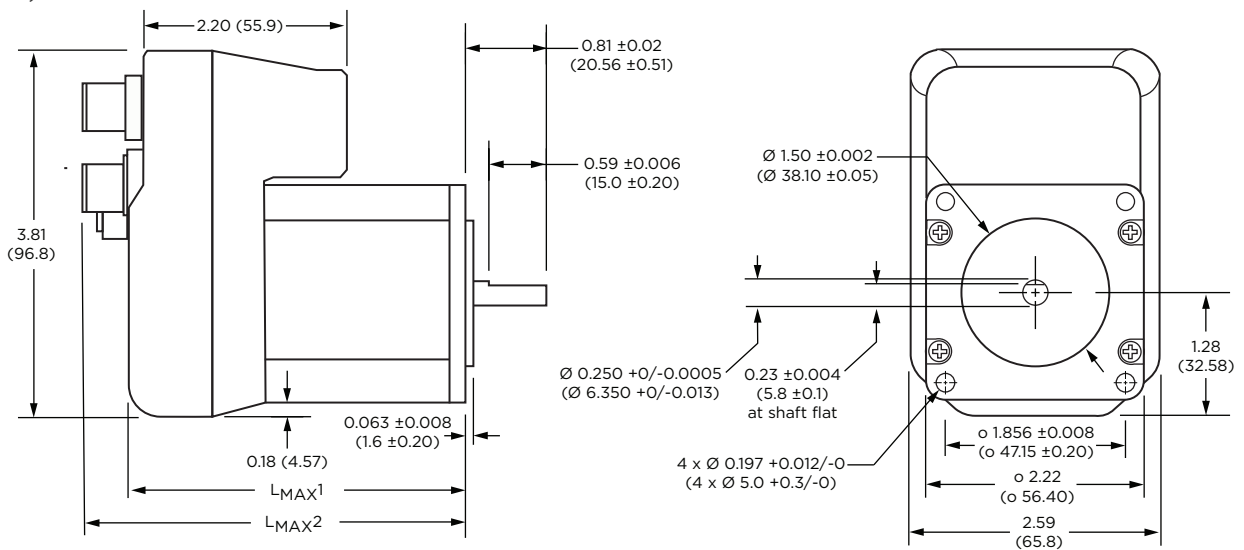

Motor Stack Length	Lmax1		Lmax2	
	Standard - LMD	High torque - LMH	Standard - LMD	High torque - LMH
Single	3.22 (81.8)	3.32 (84.3)	3.91 (99.3)	4.01 (101.8)
Double	3.63 (92.3)	3.73 (94.8)	4.26 (108.2)	4.36 (110.7)
Triple	4.50 (114.3)	4.60 (116.8)	5.13 (130.3)	5.23 (133.0)

¹ Motor shaft is not sealed. To meet an IP65 rating, ensure that the shaft end of the motor is properly sealed.

Three-dimensional depictions of this product are available for download from <https://novantaims.com/downloads/3dconfigurator/>



LMD•A57 CANopen

Motor Performance

Motor	Stack length	LMD•57 Standard Torque			LMH•57 High Torque		
		Single	Double	Triple	Single	Double	Triple
Holding torque	oz-in	103	159	242	152	264	416
	N-cm	73	112	171	107	186	294
Detent torque	oz-in	3.9	5.6	9.7	8.5	14.2	21.2
	N-cm	2.7	3.9	6.9	6.0	10	15
Rotor inertia	oz-in-sec ²	0.0025	0.0037	0.0065	0.0019	0.0030	0.0065
	kg-cm ²	0.18	0.26	0.46	0.14	0.22	0.46
Radial load limit, center of shaft	lbs	15	15	15	15	15	15
	kg	6.8	6.8	6.8	6.8	6.8	6.8
Axial load limit @ 1500rpm (5000 full steps/sec)	lbs	20	20	20	20	20	20
	kg	9	9	9	9	9	9
Weight (motor+driver)	oz	26.4	31.2	44.0	26.4	31.2	44.0
	g	748	885	1247	748	885	1247

Connector & Indicator Layout

IP20-rated Models

LEDs

Two signal indicators

Chassis Ground

One #6-32 screw

Connectors

P1: Power

One 2-pin screw lock

P2: I/O & Multifunction

Two keyed 7-pin spring lock

P3: Communication

One DB9 male



IP65-rated Models

LEDs

Two signal indicators

Chassis Ground

One #6-32 screw

Connectors

P1: Power


One M12 4-pin male

P3: Communication

One M12 5-pin male

P2: I/O & multifunction

One M12 12-pin male



Part Number Breakdown

Example part number **L M D C A 5 7 1 C**

Product

LMD = Lexium MDrive with standard hybrid stepper motor

LMH = Lexium MDrive with high torque stepper motor

Control type

C = Closed loop / with hMT and incremental magnetic encoder¹

A = Closed loop / with hMT and multi-turn absolute encoder¹

O = Open loop / no hMT or encoder

Communication type

A = CANopen interface

Flange size

57 = NEMA 23 2.3" / 57mm

Motor length

1 = single stack

2 = double stack

3 = triple stack

Variation — omit from part number if unwanted

C = M12 circular connectors and IP65 rating

¹ Closed loop control delivers encoder feedback and hMT enhanced motor performance.



To select from the available features and build the LMD integrated stepper motor to fit your needs, use the Novanta IMS part number builder, available online from <https://novantaims.com/resources/part-number-builders/>

UK & Ireland Distributor:



Motion Control Products Ltd.

11-15 Francis Avenue, Bournemouth
Dorset, UK BH11 8NX

Tel: +44 (0)1202 599922 | enquiries@motioncontrolproducts.com

www.motioncontrolproducts.com



Additional setup, quick reference information, and supporting documents are available for download from the Novanta IMS download website <https://novantaims.com/downloads/>